Dixell EMERSON



iPro F.A.Q.

Frequently Asked Question

FAQ-000022

Title: Live-Voltage Digital Input Connection (IPG 4 Din)

Key Words: Hardware: ipro, 4 din, ipg, hardware, digital input, voltage contacts

Product: **IPG 4 DIN**

Bios Note: ALL

Application

Not Relevant

Note:


Question

How can a live-voltage digital input be connected to the 4 din programmable controller?

Answer

To connect a live-voltage digital input to the 4 din programmable controller it is necessary to follow the electrical scheme in Img.1.

Project: None

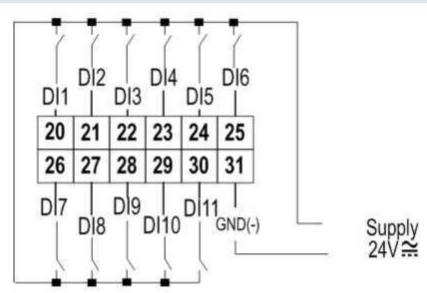

lmg. 1

DISCLAIMER

The instrument shall not be used for purposes different from those described. It cannot be used as a safety device. Dixell S.r.l. reserves the rights to change the composition of its products, even without notice, ensuring the same and unchanged functionality.

Dixell is not responsible for any impairment or damage caused by the product if used in a not specified manner.

Dixell



Dixell S.r.l. - Z.I. Via dell'Industria, 27 - 32010 Alpago (BL) ITALY Tel. +39.0437.9833 r.a. - Fax +39.0437.989313 - EmersonClimate.com/Dixell - dixell@emerson.com